

TEST REPORT OF ANSI/IES LM-79-19

APPROVED METHOD FOR OPTICAL AND ELECTRICAL MEASUREMENTS OF SOLID-STATE LIGHTING PRODUCTS

Client: Artika for Living Inc.

Address: 1756, 50e Avenue Montréal (Lachine), Québec Canada H8T 2V5

Test Model: PLU01R-1528T-830

All Models: PLU01R-1528T-830, 15FLPR-SPx-xxxxxx (x-xxxxxx in the model designation could be any numbers, letters or blank, which indicates customer code. PLU01R-1528T-830 and 15FLPR-SPx-xxxxxx are same except model name)

Brand Name: 

Testing Laboratory: Guangdong Meide Testing Technology Co., Ltd.

Address: 1st floor, B Area, Jinbaisheng Industrial Park, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China

Testing location: As above


Report No.: N02A22030775L00901

Date of receipt: Dec. 21, 2021

Date of test: Dec. 21, 2021


Date of report: Apr. 02, 2022

Tested by:



Brooke Zheng/ Test Engineer

Checked by:



Sandy Chen/ Project Engineer

Approved by:



Guangdong Meide Testing Technology Co., Ltd.
* CERTIFICATE *

Jessie Li/ Technical Manager

Note 1: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Guangdong Meide Testing Technology Co., Ltd. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Note 2: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Note 3: This report contains data that are not covered by the NVLAP accreditation. It is marked * in the title.



1. Product Description for Equipment under Test(EUT)

Model No.:	PLU01R-1528T-830
Manufacturer:	ZHEJIANG TWINSEL ELECTRONIC TECHNOLOGY CO.,LTD
Product Type:	LED ceiling light
Rated Voltage/Frequency:	120V AC, 60Hz
Rated Power:	28W
Rated luminous flux:	2000lm
Nominal CCT:	3000K
LED Manufacturer:	MLS CO., LTD
LED Model No.:	E2835X1X2X3X4-P

2. Standards Used

- ANSI/IES LM-79-19:APPROVED METHOD:OPTICAL AND ELECTRICAL MEASUREMENTS OF SOLID-STATE LIGHTING PRODUCTS
 - IES TM-30-18 IES Method for Evaluating Light Source Color Rendition (This Method is not in Nvlap accreditation scope)

3. Test equipment list

Test Equipment	Serial No.	Model No.	Calibration due date
Full-field Speed Goniophotometer	MD-E028	GO-R5000	2022/09/17
Digital Power Meter	MD-E001	PF2010	2022/09/17
AC Testing Power Source	MD-E002	DPS1060	2022/09/17
Total Spectral Radiant Flux Standard Lamp	MD-E007	D908S	2022/10/13
Integrating Sphere System	MD-E029	2M	2022/09/17
High Accuracy Array Spectroradio Meter	MD-E011	HAAS-3000	2022/09/17
Digital Power Meter	MD-E008	PF310	2022/09/17
AC Testing Power Source	MD-E010	DPS1010	2022/09/17
Standard Lamp	MD-E036	D204	2022/10/13

Statement of Traceability: Guangdong Meide Testing Technology Co., Ltd. attested that all calibration has been performed using suitable standards traceable to national primary standards and International System of Unit(SI).



4. Test Method

Requirements of Ambient Condition

Product was tested with no seasoning. All stabilization and measurements were made in compliance with ANSI/IES LM-79-19. The product was operated at rated voltage or at voltage required by manufacturer. The ambient temperature of the sample was maintained at $25^{\circ}\text{C} \pm 1.2^{\circ}\text{C}$ during measurement. And relative humidity between 10% and 65%.

Goniophotometer System

The sample was tested according to the ANSI/IES LM-79-19.

Photometric parameters were measured using a type C goniophotometer and software. The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, Luminous efficacy, zonal flux were calculated from the software taken at 1° vertical intervals and 22.5° horizontal intervals. Photometric distance was more than five times of the Largest dimension of the test SSL product.

Integrating Sphere System

The sample was tested according to the ANSI/IES LM-79-19.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. Coating reflectance of the integrating sphere was 90% to 98%. Photometric measurement conditions was using 4π geometry. The self-absorption factor is applied in the final test result. The sample was operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Fidelity Index (R_f) and Gamut Index (R_g) Calculation

The R_f , R_g was calculated according to IES TM-30-18 by using calculation tools. The calculation was based on the measured SPD from 380nm to 780nm with 1nm intervals. All the colors in this report is for reference only.



5. Integrating Sphere Test Results

5.1 Test Data

Test Ambient Temperature (Integrating sphere internal temperature)	25.1°C	Test orientation	Downward
Operate time(Min.)	60	stabilization time(Min.)	45

Optical and Electrical Measurement Result

Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Luminous Flux (lm)	Efficacy (lm/W)
120.03	60	0.2509	26.83	0.8911	2010.8	74.95

CCT (K)	Ra	R9	x	y	u'	v'
3130	83.2	10	0.4266	0.3977	0.2466	0.5173

Color Rendering Index

Ra

83.2

R1

82

R2

90

R3

97

R4

82

R5

82

R6

88

R7

84

R8

61

R9

10

R10

78

R11

81

R12

71

R13

84

R14

98

R15

75

*ANSI/IES TM-30-18 Color Rendition Report






ANSI/IES TM-30-18 Color Rendition Report

Source: E2835X1X2X3X4-P

Date: 2021/12/21

Manufacturer: ZHEJIANG TWINSEL ELECTRONIC TECHNOLOGY CO., LTD

Model: PLU01R-1528T-830

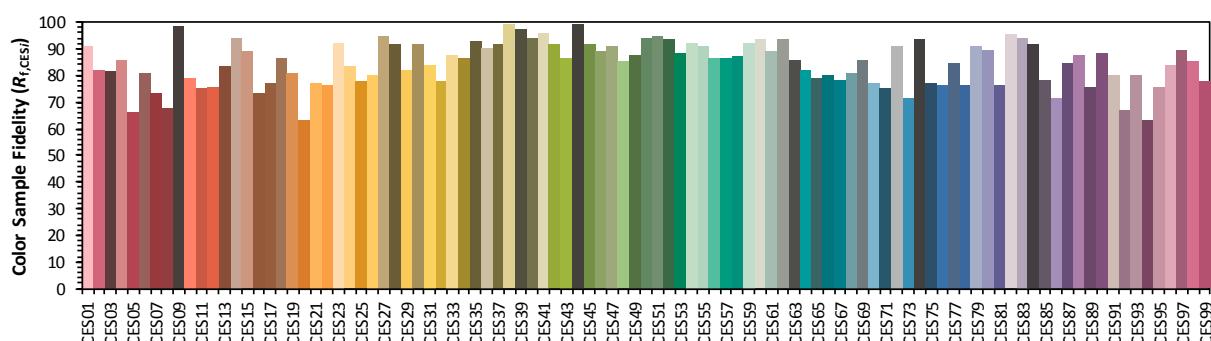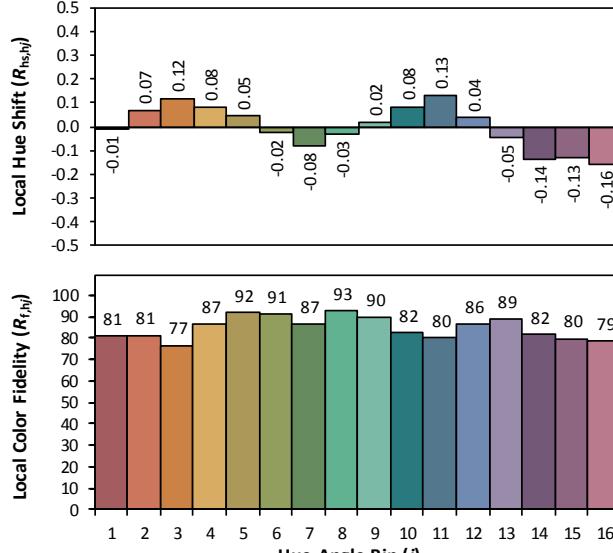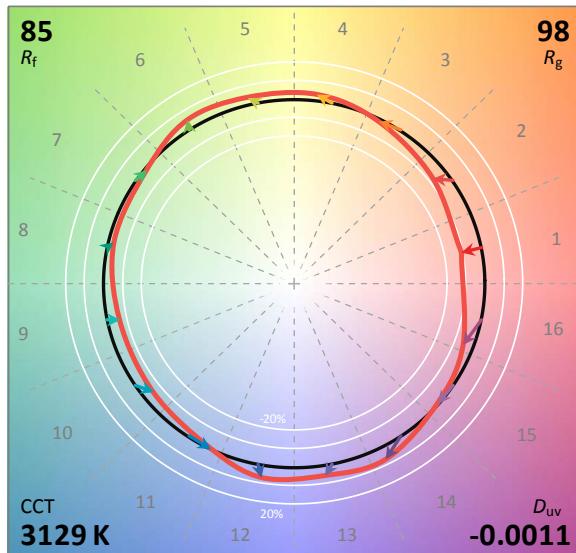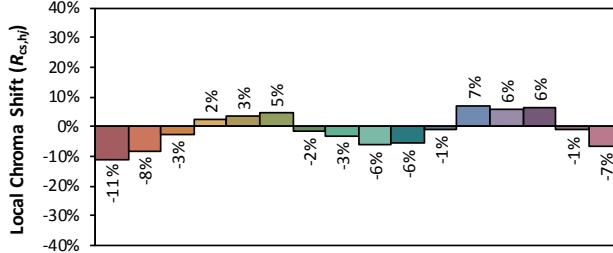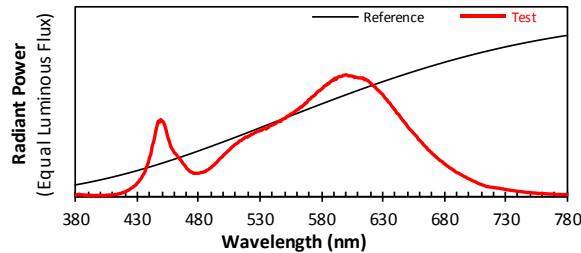


Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4266
 y 0.3976
 u' 0.2467
 v' 0.5173

CIE 13.3-1995
 (CRI)
 R_a 83
 R_g 10

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

Relative Spectral Power Distribution

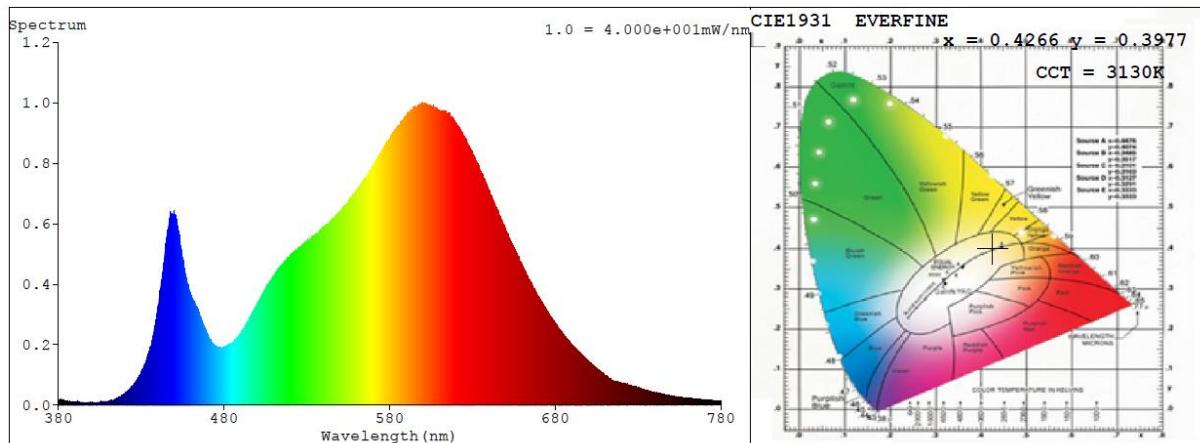

nm	mW								
380	0.0088	414	0.0183	448	0.6089	482	0.1971	516	0.4706
381	0.0129	415	0.021	449	0.6297	483	0.1961	517	0.4756
382	0.0171	416	0.0234	450	0.6182	484	0.2014	518	0.4857
383	0.0166	417	0.0259	451	0.6132	485	0.2003	519	0.4878
384	0.0119	418	0.0313	452	0.5905	486	0.2097	520	0.4868
385	0.0137	419	0.0314	453	0.5605	487	0.2155	521	0.4971
386	0.0095	420	0.0377	454	0.5187	488	0.2209	522	0.5001
387	0.0118	421	0.0413	455	0.4786	489	0.2297	523	0.5102
388	0.0066	422	0.0489	456	0.4538	490	0.2352	524	0.5117
389	0.011	423	0.0515	457	0.4173	491	0.2465	525	0.517
390	0.0052	424	0.0595	458	0.3949	492	0.2529	526	0.5249
391	0.0044	425	0.0665	459	0.3802	493	0.2628	527	0.5283
392	0.009	426	0.0721	460	0.3607	494	0.2729	528	0.5348
393	0.0076	427	0.0807	461	0.3502	495	0.2816	529	0.5361
394	0.0072	428	0.0864	462	0.3404	496	0.2946	530	0.5416
395	0.0055	429	0.0969	463	0.3244	497	0.306	531	0.5416
396	0.0067	430	0.11	464	0.3135	498	0.3162	532	0.548
397	0.0082	431	0.1195	465	0.3019	499	0.3224	533	0.5573
398	0.0077	432	0.1353	466	0.2894	500	0.3353	534	0.5593
399	0.0073	433	0.145	467	0.2728	501	0.3447	535	0.5524
400	0.0083	434	0.1648	468	0.261	502	0.3543	536	0.5628
401	0.0074	435	0.1811	469	0.2489	503	0.3626	537	0.5667
402	0.0066	436	0.1958	470	0.2334	504	0.3728	538	0.5819
403	0.0058	437	0.2272	471	0.2214	505	0.3806	539	0.583
404	0.0083	438	0.2537	472	0.2149	506	0.3907	540	0.5852
405	0.0101	439	0.2808	473	0.2031	507	0.4034	541	0.5906
406	0.009	440	0.3221	474	0.1993	508	0.4101	542	0.5953
407	0.0121	441	0.3476	475	0.1955	509	0.4208	543	0.6
408	0.0101	442	0.4085	476	0.1872	510	0.4276	544	0.6088
409	0.0107	443	0.4396	477	0.1901	511	0.4338	545	0.6144
410	0.0125	444	0.4808	478	0.1888	512	0.4408	546	0.6153
411	0.0139	445	0.5358	479	0.1888	513	0.4533	547	0.6165
412	0.0153	446	0.5764	480	0.1902	514	0.4565	548	0.6316
413	0.0157	447	0.617	481	0.1918	515	0.4605	549	0.6345



nm	mW								
550	0.6408	599	0.996	648	0.6056	697	0.16	746	0.0346
551	0.6429	600	0.9979	649	0.5951	698	0.1576	747	0.033
552	0.658	601	0.9958	650	0.5787	699	0.149	748	0.0313
553	0.6598	602	0.9898	651	0.5639	700	0.1451	749	0.0315
554	0.6669	603	0.9895	652	0.5526	701	0.1399	750	0.0317
555	0.6754	604	0.9902	653	0.5431	702	0.1349	751	0.0288
556	0.679	605	0.9868	654	0.532	703	0.131	752	0.0283
557	0.6859	606	0.9867	655	0.5201	704	0.1254	753	0.0279
558	0.6936	607	0.9761	656	0.5101	705	0.1221	754	0.0269
559	0.7004	608	0.9797	657	0.4985	706	0.117	755	0.0264
560	0.7096	609	0.9769	658	0.4884	707	0.1116	756	0.0248
561	0.7128	610	0.9735	659	0.471	708	0.1062	757	0.0247
562	0.7237	611	0.9725	660	0.461	709	0.1023	758	0.0235
563	0.7341	612	0.9726	661	0.4524	710	0.0984	759	0.0229
564	0.7339	613	0.9711	662	0.4427	711	0.0957	760	0.0221
565	0.7452	614	0.9731	663	0.428	712	0.0911	761	0.0224
566	0.7522	615	0.958	664	0.4168	713	0.088	762	0.0219
567	0.7654	616	0.9624	665	0.4078	714	0.083	763	0.0208
568	0.7675	617	0.9536	666	0.3985	715	0.08	764	0.0206
569	0.7837	618	0.951	667	0.383	716	0.0788	765	0.0196
570	0.7956	619	0.94	668	0.3765	717	0.0763	766	0.0194
571	0.8001	620	0.932	669	0.3653	718	0.0753	767	0.0189
572	0.8129	621	0.9216	670	0.3568	719	0.0751	768	0.0188
573	0.8197	622	0.9111	671	0.3443	720	0.0727	769	0.0183
574	0.8265	623	0.9033	672	0.3395	721	0.0714	770	0.018
575	0.8339	624	0.8959	673	0.3277	722	0.0705	771	0.0168
576	0.8482	625	0.8834	674	0.3202	723	0.0687	772	0.0149
577	0.8585	626	0.8738	675	0.3108	724	0.0672	773	0.016
578	0.8662	627	0.8659	676	0.3015	725	0.0671	774	0.0165
579	0.8699	628	0.8557	677	0.2931	726	0.0642	775	0.0157
580	0.8803	629	0.8454	678	0.2881	727	0.062	776	0.0155
581	0.8869	630	0.8368	679	0.2807	728	0.0616	777	0.0147
582	0.9007	631	0.8224	680	0.2685	729	0.0585	778	0.0137
583	0.909	632	0.8077	681	0.2639	730	0.0568	779	0.0143
584	0.9126	633	0.7984	682	0.2537	731	0.0558	780	0.0144
585	0.9251	634	0.7857	683	0.2478	732	0.0527		
586	0.9242	635	0.7709	684	0.2405	733	0.0518		
587	0.9381	636	0.7654	685	0.2318	734	0.05		
588	0.9443	637	0.7464	686	0.2276	735	0.0486		
589	0.9545	638	0.7347	687	0.219	736	0.0481		
590	0.9531	639	0.7206	688	0.2145	737	0.0465		
591	0.9712	640	0.7097	689	0.2046	738	0.0445		
592	0.9606	641	0.6935	690	0.1985	739	0.0427		
593	0.9742	642	0.6796	691	0.193	740	0.0414		
594	0.9813	643	0.6743	692	0.1904	741	0.0404		
595	0.9845	644	0.6572	693	0.1831	742	0.0394		
596	0.9847	645	0.6436	694	0.178	743	0.0382		
597	0.9877	646	0.6292	695	0.172	744	0.0377		
598	0.9943	647	0.6178	696	0.1662	745	0.0349		

6. Goniophotometer Test results

6.1 Test Data

Test Ambient Temperature	25.1°C	Test orientation	Downward
Operate time(Min.)	90	stabilization time(Min.)	60


Electrical Measurement

Input Voltage (V)	Frequency (Hz)	Input Current(A)	Power Factor	Power(W)
120.2	60	0.2497	0.8941	26.83

Optical Measurement

Luminous Flux (lm)	Efficacy(lm/W)	I_{max}(cd)	Spacing Criteria (C0/180°)	Spacing Criteria (C90/270°)
2018.4	75.23	698.3	1.27	1.29

6.2 Luminous Intensity Distribution

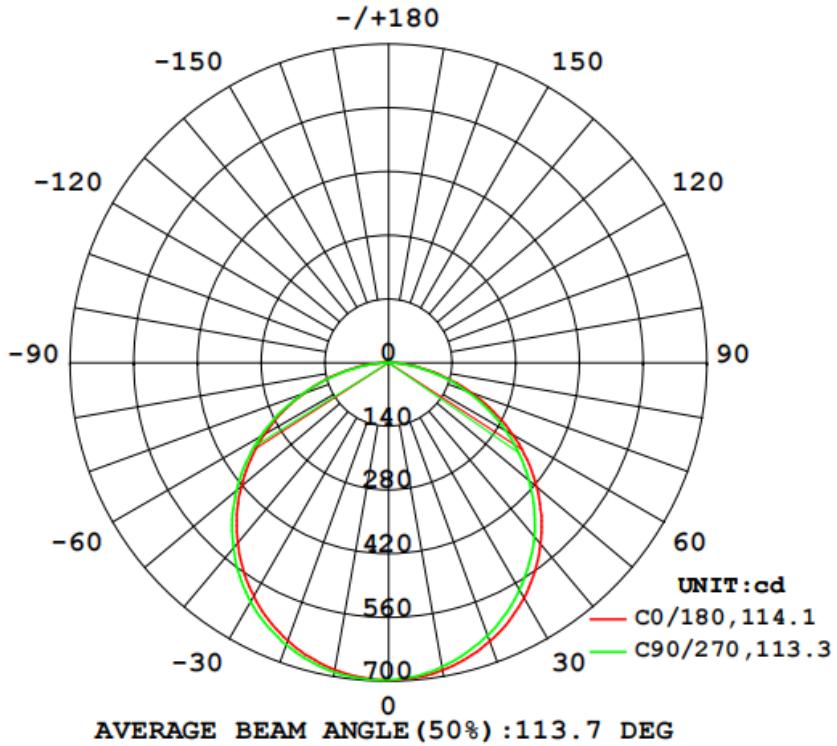



6.3 Zonal Flux Diagram

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φlum,lamp
10	685.3	681.3	678.4	679.2	685.1	688.5	690.3	689.1	0- 10	65.95	65.95	3.27,3.27
20	651.5	642.6	637.1	639.7	649.5	656.3	659.7	657.9	10- 20	189.1	255.0	12.6,12.6
30	595.9	583.9	576.1	579.6	593.1	601.7	607.3	604.6	20- 30	287.5	542.5	26.9,26.9
40	520.1	506.2	498.2	502.5	516.7	526.5	531.4	529.8	30- 40	348.4	890.9	44.1,44.1
50	425.3	411.4	403.6	408.4	423.2	432.8	436.9	435.1	40- 50	363.4	1254	62.1,62.1
60	314.7	302.8	296.9	302.1	315.6	323.7	326.1	323.3	50- 60	329.7	1584	78.5,78.5
70	194.1	185.4	182.0	187.8	200.1	203.4	202.7	201.4	60- 70	251.7	1836	90.9,90.9
80	79.37	74.48	72.84	79.13	87.12	85.27	81.02	81.53	70- 80	143.4	1979	98.1,98.1
90	0.0803	0.0836	0.1154	0.2225	0.1552	0.1560	0.2152	0.1580	80- 90	37.12	2016	99.9,99.9
100	0.1255	0.1268	0.1223	0.1251	0.2330	0.2407	0.2327	0.2389	90-100	0.1627	2016	99.9,99.9
110	0.1890	0.1874	0.1887	0.1856	0.2659	0.2679	0.2598	0.2666	100-110	0.2190	2017	99.9,99.9
120	0.2654	0.2636	0.2974	0.2704	0.2565	0.2641	0.2763	0.2644	110-120	0.2450	2017	99.9,99.9
130	0.3653	0.3748	0.4112	0.3777	0.3409	0.3396	0.3611	0.3495	120-130	0.2827	2017	99.9,99.9
140	0.4478	0.4559	0.4849	0.4597	0.5122	0.5158	0.5172	0.5280	130-140	0.3316	2017	100,100
150	0.4734	0.4836	0.4972	0.4902	0.6705	0.6846	0.6692	0.6892	140-150	0.3395	2018	100,100
160	0.5094	0.5748	0.5829	0.5682	0.7419	0.7661	0.7860	0.7966	150-160	0.2901	2018	100,100
170	0.6093	0.6164	0.6432	0.6458	0.7463	0.7295	0.7735	0.7877	160-170	0.1919	2018	100,100
180	0.7040	0.7023	0.7249	0.7546	0.7075	0.6813	0.7213	0.7505	170-180	0.0677	2018	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		



6.4 Luminous Distribution Intensity (cd) Data

Table--1

C (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	UNIT: cd
y (DEG)																	
0	697	697	697	697	697	697	697	697	697	697	697	697	697	697	697	697	
5	694	693	692	692	691	691	691	692	694	694	696	697	696	698	696	696	
10	685	683	681	680	678	679	679	682	685	685	688	691	690	691	689	688	
15	671	668	665	663	660	662	662	665	670	671	675	678	678	679	676	675	
20	652	646	643	640	637	638	640	644	650	652	656	659	660	661	658	656	
25	626	620	616	612	609	611	612	617	624	628	632	635	636	637	634	631	
30	596	589	584	579	576	578	580	585	593	597	602	606	607	607	605	601	
35	560	553	547	542	539	540	543	549	557	561	566	570	572	572	570	566	
40	520	511	506	500	498	499	503	508	517	521	526	530	531	532	530	526	
45	475	466	461	455	453	454	457	463	472	477	482	486	487	488	484	481	
50	425	417	411	406	404	406	408	415	423	428	433	436	437	438	435	431	
55	372	364	359	354	352	353	357	363	371	375	380	383	383	384	381	378	
60	315	307	303	298	297	299	302	308	316	319	324	326	326	326	323	320	
65	255	249	245	241	240	242	245	251	258	262	265	266	266	266	263	261	
70	194	189	185	183	182	184	188	193	200	202	203	204	203	203	201	200	
75	134	131	127	125	125	127	131	136	142	143	142	141	140	140	139	139	
80	79.4	77.0	74.5	72.6	72.8	75.3	79.1	82.8	87.1	87.1	85.3	82.9	81.0	81.2	81.5	82.0	
85	30.5	29.5	28.1	26.9	27.3	29.5	32.7	35.7	39.0	38.2	35.9	33.1	31.3	31.2	32.0	32.9	
90	0.08	0.08	0.08	0.09	0.12	0.14	0.22	0.13	0.16	0.15	0.16	0.19	0.22	0.18	0.16	0.16	
95	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.19	0.19	0.19	0.19	0.19	0.20	0.20	0.20	
100	0.13	0.13	0.13	0.12	0.12	0.13	0.13	0.23	0.24	0.24	0.24	0.23	0.23	0.23	0.24	0.24	
105	0.16	0.16	0.16	0.15	0.15	0.15	0.16	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.27	
110	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.27	0.27	0.27	0.27	0.26	0.26	0.26	0.27	0.27	
115	0.22	0.23	0.22	0.23	0.24	0.23	0.22	0.23	0.26	0.27	0.26	0.26	0.26	0.26	0.26	0.27	
120	0.27	0.27	0.26	0.28	0.30	0.29	0.27	0.27	0.26	0.26	0.26	0.27	0.28	0.28	0.26	0.27	
125	0.32	0.32	0.33	0.35	0.36	0.34	0.33	0.32	0.28	0.29	0.29	0.30	0.31	0.31	0.30	0.29	
130	0.37	0.38	0.37	0.40	0.41	0.40	0.38	0.39	0.34	0.35	0.34	0.36	0.36	0.36	0.35	0.35	
135	0.42	0.41	0.42	0.44	0.45	0.44	0.42	0.42	0.43	0.42	0.42	0.43	0.44	0.44	0.43	0.43	
140	0.45	0.45	0.46	0.47	0.48	0.48	0.46	0.45	0.51	0.50	0.52	0.51	0.52	0.52	0.53	0.53	
145	0.48	0.48	0.47	0.48	0.49	0.50	0.48	0.48	0.62	0.60	0.61	0.60	0.60	0.61	0.62	0.62	
150	0.47	0.47	0.48	0.49	0.50	0.52	0.49	0.48	0.67	0.68	0.68	0.69	0.67	0.68	0.69	0.69	
155	0.49	0.50	0.52	0.54	0.54	0.56	0.53	0.50	0.73	0.73	0.74	0.77	0.73	0.72	0.76	0.75	
160	0.51	0.53	0.57	0.56	0.58	0.59	0.57	0.52	0.74	0.74	0.77	0.80	0.79	0.78	0.80	0.79	
165	0.55	0.57	0.60	0.59	0.60	0.63	0.61	0.55	0.75	0.74	0.75	0.79	0.78	0.77	0.78	0.81	
170	0.61	0.59	0.62	0.63	0.64	0.66	0.65	0.59	0.75	0.74	0.73	0.76	0.77	0.78	0.79	0.80	
175	0.66	0.65	0.68	0.70	0.72	0.74	0.72	0.68	0.72	0.72	0.73	0.77	0.78	0.79	0.79	0.79	
180	0.70	0.68	0.70	0.72	0.72	0.75	0.75	0.72	0.71	0.71	0.68	0.70	0.72	0.74	0.75	0.75	

7. Photo of sample



Figure 1

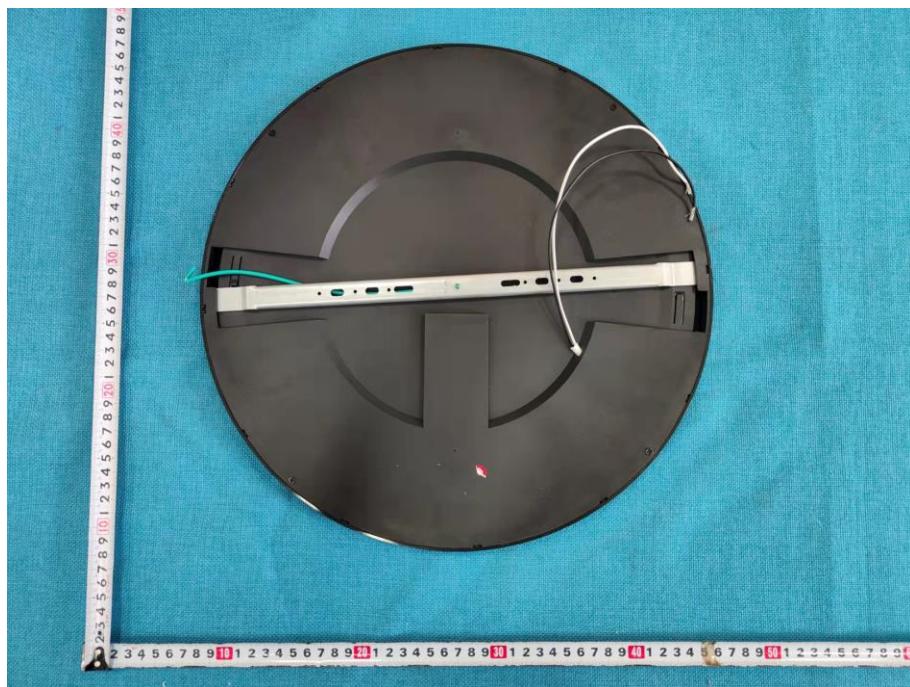


Figure 2

***** END OF REPORT*****