




<b>PRODUCT:</b>	<b>PROJECT:</b>	<b>DATE:</b>
<b>DESCRIPTION</b>	<b>FEATURES</b>	
	IP RATING: WEATHER RESISTANT POWDER COATING: DAYLIGHT SENSOR: FINISHES: DIMMABLE: 5-YEAR WARRANTY: LIGHT SOURCE:	
	<b>SPECIFICATIONS</b>	
	COLOR TEMPERATURE (K): WATTAGE (W): VOLTAGE (V): CRI: DIMMING: FINISHES: PRODUCT DIMENSION: <b>D:</b> <b>L:</b> <b>W:</b> <b>H:</b> RATED LIFE (Y): CONSTRUCTION: MOUNTING:	
<b>CERTIFICATIONS</b>		

<b>TECHNICAL DRAWING</b>	<b>Model &amp; Size</b>	<b>CRI</b>	<b>Kelvins</b>	<b>Watts</b>	<b>LED Lumens</b>	<b>Delivered</b>

**NOTES:**

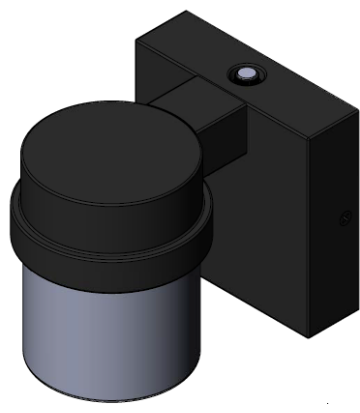

**STAMP**

*Artika reserves the right to modify its products from time to time as part of our continuous improvement program.*



**CARACTÉRISTIQUES**

IP HUMIDE :	INDICE
REVÊTEMENT EN POUDRE RÉSISTANT AUX INTEMPÉRIES :	OUI
CAPTEUR DE LUMIÈRE DU JOUR :	NA
FINITIONS :	NOIR
GARANTIE DE 5 ANS :	DIMMABLE : OUI (0-10V, 100-10%) OUI
SOURCE DE LUMIÈRE :	LED INTÉGRÉE

**CARACTÉRISTIQUES**

TEMPÉRATURE DE COULEUR :	(K) : 3000K
PUISSANCE (W) :	12 W
TENSION (V) :	120-277V
IRC :	90+
ATTÉNUATION :	0-10 V (100-10 %)
FINITIONS :	Noir
DIMENSIONS DU PRODUIT : D :	L : 3,9"      L : 3,9"      Hauteur : 4,72"
DURÉE DE VIE NOMINALE (Y) :	50 000 heures
CONSTRUCTION :	ACIER ET ACRYLIQUE
MONTAGE :	COMPRIS

**CERTIFICATIONS**


**DESSIN TECHNIQUE**



Modèle et taille	IRC	Kelvins	Watts	Lumens LED	Livré
OUT-KIM-MB1710V-JA	90+	3000K	12W	N/A	650lm

**REMARQUES**

Conforme JA8 (Titre 24), certifié ETL, ADA, cellule photoélectrique



TIMBRE

Artika se réserve le droit de modifier ses produits de temps à autre dans le cadre de notre programme d'amélioration continue.